



SHENZHEN TEYELEEC TECHNOLOGY CO., LTD.

Add: Room 303, BLD 72, Yang Tai New Village, ChiLingTou, DaLang
Street, LongHua District, Shenzhen, GuangDong, China.

Zip: 518109

Email: sales@teyeleec.com

Web: www.teyeleec.com



T-MKT-EC-2020-V0

CATALOG



Teyeleec[®]

Products

Catalog

SHENZHEN TEYELEEC TECHNOLOGY CO., LTD.

www.teyeleec.com



SHENZHEN TEYELEEC TECHNOLOGY CO., LTD , established in 2015, focusing on various video lights for photography and Vlog marketing area. We provides one-stop solution from ID design, R&D, manufacturing and transportation. SHENZHEN TEYELEEC TECHNOLOGY CO., LTD has own brand called Teyeleec.

What we can offer?

1. Good price: We professionally manufacture electronic-related items in China for over 10 years. Our price is quite competitive.
2. Good quality: We always regard quality on prior position. We have strict examine procedure from the raw material to goods storage in warehouse.
3. Good warranty: We offer one-year free warranty service for all products.
4. OEM & ODM service: We provide the service from ID design, R&D, manufacturing and transportation. We take OEM and ODM orders too.

We adhere to the enterprise concept of "*serve every customer with heart*" and we'll do our best to serve every customer wholeheartedly!



CONTENTS

| | |
|------------------------------------|----|
| Aluminum Alloy LED Light - - - - - | 2 |
| RGB/Colorful Light - - - - - | 8 |
| Ring Fill Light - - - - - | 13 |
| Ordinary LED Light - - - - - | 17 |
| Accessories - - - - - | 22 |





Aluminum Alloy LED Light





TA77

- LED: 77PCS
- Battery: 2800mAh Li-Polymer battery
- Illumination: 1520 lux (0.5m)
- Color temperature: 2500K-8500K
- Light-emitting angle: 360°
- Color rendering: CRI≥96
- Brightness adjustment: 0%-100%
- Input: 5V/2A
- Charging: Type-C 5V/3.1A, 9V/2A, 12V/1.5A 18W(Max)
- Working Voltage: 2.8V-4.2V
- Runtime: 3 Hours under 100% brightness, 60 hours under 5% brightness
- Digital screen: OLED
- Material and finish: high-strength aluminum + type HAIII hard-anodized anti-abrasive finish
- Net Weight: 167g±10g
- Size: 97*87*20mm



TA96

- LED: 96pcs
- Battery: Build-in Li-Polymer 3200mAh
- Color Temperature: 3000K-5500K(±200K)
- Power: 8W (Max)
- Input: Type-C 5V/1A 5V/2A
- Light angle: 120°
- Color Rendering: RA≥96
- Working time: 1 H under 100% brightness, 17 Hours under 5% brightness
- Screen: LCD
- Net Weight: 146g
- Size: 116*68*10mm





TA112

- LED: 112pcs
- Max Power: 9W(Dual Color Temperature)
- Built-in Polymer Battery: DC3.85V 2470mAh
- Color Temperature Range: 3200-5600K
- Color Rendering: RA>96
- Dimming Range: 5-100%
- Charging Time: Approx. 3.5 hours
- Usage Temperature: -10-35°C
- Charger Input: 5V 1A/5V 2A
- Fix Connector: 4/1 Screw
- Net Weight: 130g
- Size: 125.7*70*10.3mm






TA120

- LED: 120pcs
- Battery: Build-in Li-Polymer 3200mAh
- Color Temperature: 3000K-5500K(±200K)
- Power: 8W (Max)
- Input: Type-C 5V/1A 5V/2A
- Light angle: 120°
- Color Rendering: RA≥96
- Working time: 1 H under 100% brightness, 17 Hours under 5% brightness
- Screen: LCD
- Net Weight: 168g
- Size: 116*68*12mm



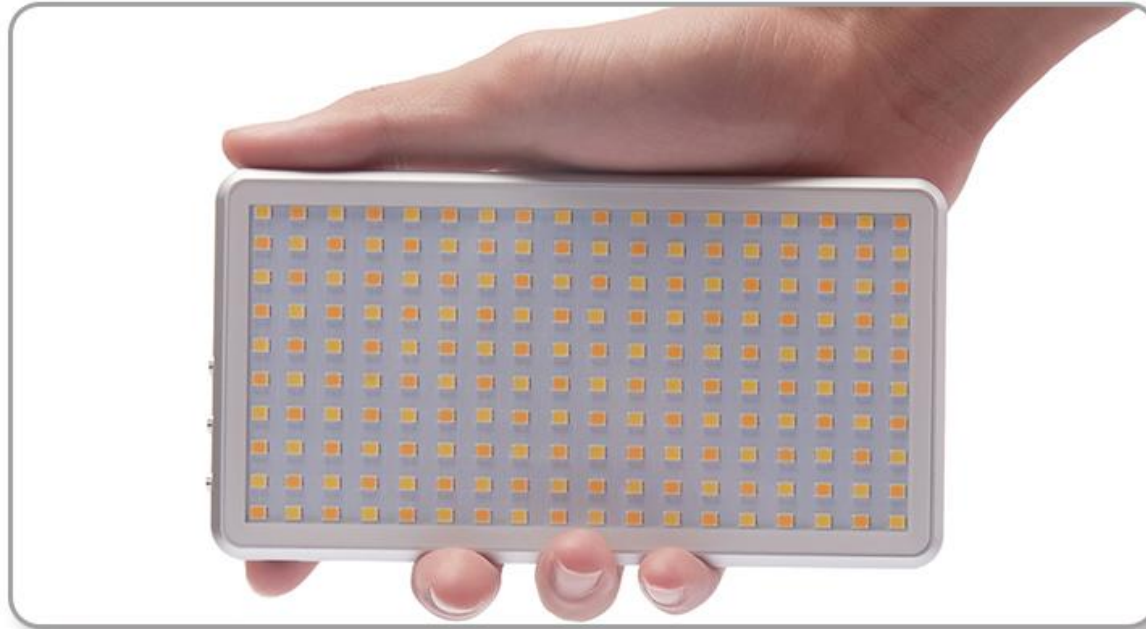

TA180


- LED: 180pcs
- Built-in Polymer Battery: 3.85V 4040mAh
- Max Power: 12W
- Color Temperature Range: 3200K-5600K
- Color Rendering: >96
- Dimming Range: 5-100%
- Charging Time: Approx. 4 hours
- Battery Working Time (5600K Power Continuous Output Approx. 1.5 hours)
- Usage Temperature: -10-35°C
- Store Temperature: -10-60°C
- Net Weight: 180g (approx.)
- Size: 151.5*80*9.8mm



TA180C

- LED: 180pcs (warm lamp 90 /cold lamp 90)
- Power: 12W (Max)
- Input: Micro USB 5V/2A / Type-C USB 5V/2A
- Light (luminous flux): 1200LM (100%, 5600K)
- Color temperature: 3100-5500K
- Light angle: 120°
- Color rendering: ≥96
- Average Hour: 50000h
- Capacity: 4000mah
- Weight: 210±10g
- Working temperature: -10~35°
- Storage temperature: -10-60°C
- Net Weight: 194g
- Dimension: 151*76*10mm



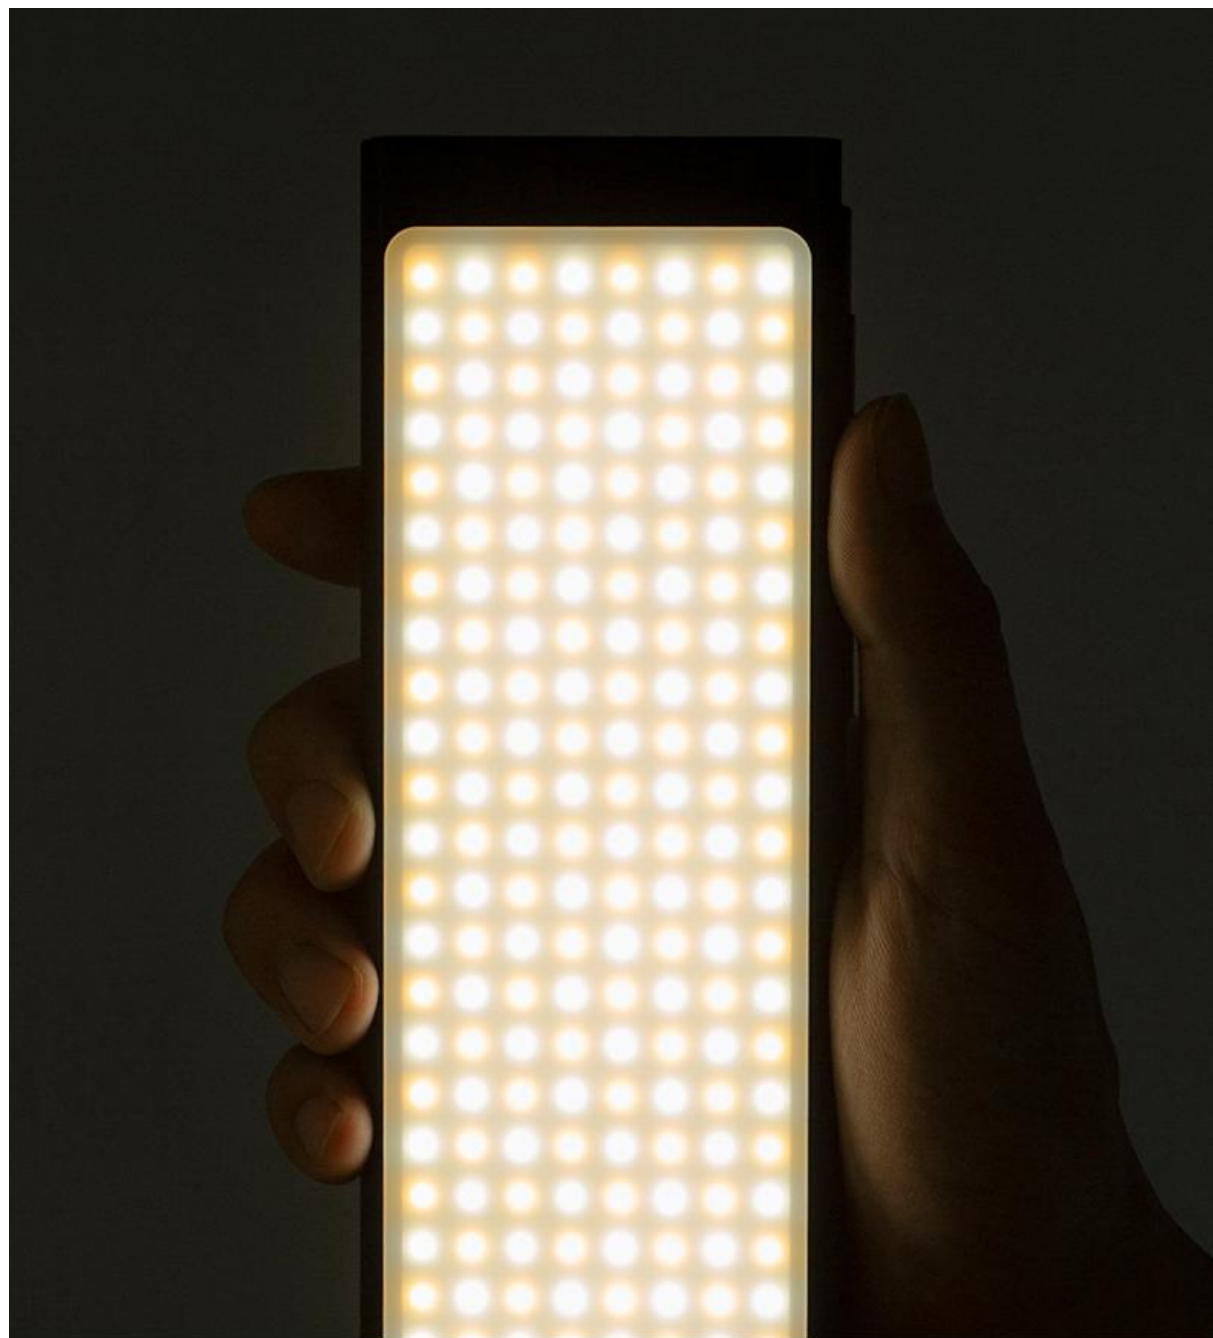

TA184

- LED: 184pcs (Cold light: 92pcs, warm light: 92pcs)
- Max Illumination: >1000lm (100%,5600K)
- Battery: Build-in Li-ion 3.7V 5000mAh
- Max Power: 12W
- Color Temperature: 3200K-5600K (±250K)
- Color Rendering: CRI>95
- Working time: Around 100minutes (100%, 5600K)
- Display: LCD (Brightness, Color temperature, battery power, time)
- Charging Time: Around 3 hours
- Input: USB-C 5V/2A
- Output: USB 5V/2A
- Light Angle: >120 degree
- Working Temperature: -10-35°C
- Storage temperature: -10-60°C
- Net weight: 243g
- Size: 183*67*16mm





RGB/Colorful LED Light



TC97A-RGB

- LED: 97PCS
- Battery: 2800mAh Li-Polymer battery
- Illumination: 1520 lux (0.5m)
- Color temperature: 2500K-8500K
- Light-emitting angle: 360°
- Color rendering: CRI≥96
- Brightness adjustment: 0%-100%
- Input: 5V/2A
- Charging: Type-C 5V/3.1A, 9V/2A, 12V/1.5A 18W(Max)
- Working Voltage: 2.8V-4.2V
- Runtime: 2 hours under 100% brightness, 47 hours under 5% brightness
- Digital screen: OLED
- Material and finish: high-strength aluminum + type HAIII hard-anodized anti-abrasive finish
- Net Weight: 160g±10g
- Size: 100*86*17mm



TC120AC-RGB

- LED: 120pcs
- Light efficiency mode: 12 modes
- Max Illumination: 980LUX/0.5m
- Built-in Li-polymer Battery: 3.85V 4400mAh 16.94Wh
- Maximum power: 8W
- Color Temperature range: 2500-8500K
- Material: Aluminum Alloy
- RGB Color: HSI 0-360°
- Light Angle: 120°
- Color rendering Ra≥97+
- Working time: 150mins under 100% brightness
- Dimming range: 0-100
- Input: Type-C 5V/2A
- Net Weight: 180g
- Size: 119*73*13mm






TC135A-RGB

- LED: 135pcs
- Light efficiency mode: 21 modes
- Max Illumination: 1200LUX/0.5m 5600K
- Built-in Lithium Battery: 3.7V 4000mAh
- Maximum power: 13W
- RGB color gamut: 0-360° full color (HSL)
- Color Temperature range: 3200-5600K
- Material: Aluminum Alloy
- Working Time: 90 minutes(100%, 5600K)
- Color rendering Ra≥96+
- Dimming range: 1-100%
- Input: USB-C 5V/2A
- Output: USB 5V/2A
- Net Weight: 200g
- Size: 151*80*11.5mm



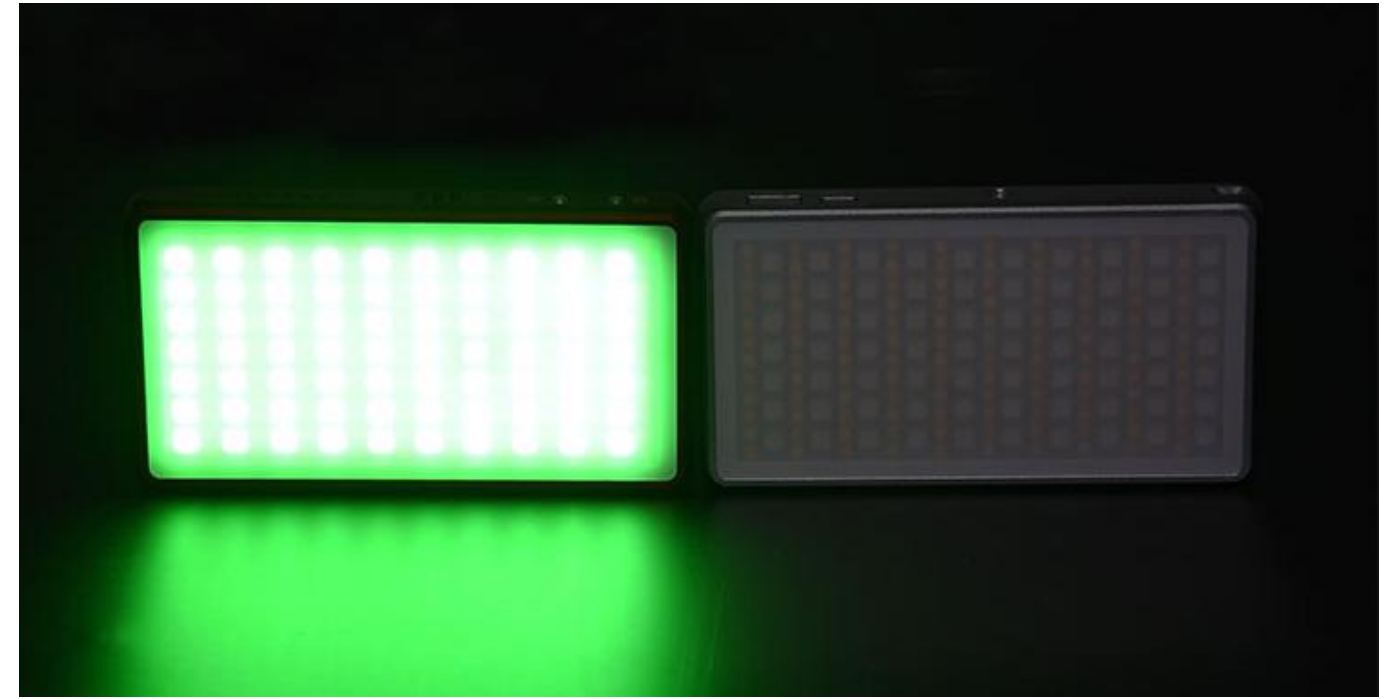

TC150AR-RGB

- LED: 150pcs
- Built-in Li-polymer Battery: 7.4V 3200mAh
- Maximum power: 12W
- Color Temperature range: 2500-8500K
- Material: Aluminum Alloy
- RGB Color: HSI 0-360°
- Color rendering Ra>97
- Dimming range: 0-100
- Charging time: 2.5 Hours
- Run-time: 150minutes under 100% brightness
- Input: Type-C 5V/9V/12V, QC3.0 quick-charging compatible
- Net Weight: 450g
- Size: 133*83*16mm



TC190AM-RGB

- LED: 190pcs
- Power: 18W
- Illumination: 1600 lux
- Color temperature: 2500K-8500K
- Light-emitting angle: 120°
- Hue and saturation: 0-360° regulation
- Color rendering: CRI≥96, TLCI≥98
- Brightness adjustment: 0%-100%
- Charging: Type-C 5V/9V/12V, QC3.0/QC2.0/AFC quick-charging compatible
- Battery: 5000mAh Li-Polymer battery
- Charging time: 1 hour for quick, 2 hours for common
- Runtime: 100% for 180 minutes, 5% for 28 hours
- Digital screen: OLED
- Material: Aluminum Alloy
- Net Weight: 210g±10g
- Size: 129.5mm*71.5mm*15mm





TC316A-RGB

- LED: 316pcs
- Max Illumination: 2960 LUX (0.5M)
- Battery: Build-in Li-polymer 7.4V 3200mAh
- Max Power: 20W
- Color Temperature: 2600K-12000K (±250K)
- Color Rendering: CRI>97
- Working time: Around 105 minutes (100%, 12000K)
- Charging: USB-C 5V 9V Fast Charging
- Brightness adjustment: 0-100 degree
- Working Temperature: -10-35°C
- Storage temperature: -10-60°C
- Material: Aluminum Alloy
- Net weight: 370g
- Size: 125.6*80.7*31mm



TC50RGB

- LED: 50pcs
- Battery Capacity: 2700mAh 2.7V
- Power: 6.6W
- Light Angle: 120°
- Brightness adjustment: 0-100%
- Illumination: >800LM
- Color rendering: RA>95
- Color temperature: 3200K/4500K/5600K
- Charging: Around 4 hours via Micro USB
- Working time: Approx. 2 hours under 100% brightness
- Net weight: 100g
- Size: 107*65*15mm





Ring Fill Light



TR360

- LED: 360pcs (Cold light: 180pcs, warm light: 180pcs)
- Max Power: 70W
- Max Illumination: 1500LUX/1m
- Color Temperature: 3200K-5600K
- Color Rendering: CRI>95
- Display: LCD (Brightness, Color temperature, battery power)
- Control Way: Switch+Push Button
- Light Angle: >120 degree
- Working Temperature: 0-40°C
- Storage temperature: -10-50°C
- Net weight: 3300g
- Size: 539*38*548mm



TR6



- LED: 72pcs
- Max Power: White LED 7W, Warm LED 7W
- Color Temperature: 3000-6500K
- Inner Diameter: 113mm
- Outer Diameter: 160mm
- Adjust way: Wired Remote Dimming
- Power Supply: USB
- Voltage: 5V
- Wired Cable Length: 2 meters
- Net weight: 113g

TR8



- LED: 72pcs
- Max Power: White LED 7W, Warm LED 7W
- Color Temperature: 3000-6500K
- Inner Diameter: 150mm
- Outer Diameter: 200mm
- Adjust way: Wired Remote Dimming
- Power Supply: USB
- Voltage: 5V
- Wired Cable Length: 2 meters
- Net weight: 146g

Three Color Temperature Switch at Will

Shoot Different Effects With Scene Dimming



Warm Light



White Warm Light



White Light

TR10



- LED: 128pcs
- Max Power: White LED 10W, Warm LED 10W
- Color Temperature: 3000-6500K
- Inner Diameter: 190mm
- Outer Diameter: 260mm
- Adjust way: Wired Remote Dimming
- Power Supply: USB
- Voltage: 5V
- Wired Cable Length: 2 meters
- Net weight: 215g

TR12



- LED: 144pcs
- Max Power: White LED 14W, Warm LED 14W
- Color Temperature: 3000-6500K
- Inner Diameter: 252mm
- Outer Diameter: 320mm
- Adjust way: Wired Remote Dimming
- Power Supply: USB
- Voltage: 5V
- Wired Cable Length: 2 meters
- Net weight: 245g

Ring Fill Light

TR14



- LED: 336pcs
- Max Power: White LED 30W, Warm LED 30W
- Color Temperature: 3000-6500K
- Inner Diameter: 270mm
- Outer Diameter: 360mm
- Adjust way: Wired Remote Dimming + Remote Control
- Power Supply: Adapter / Charger
- Voltage: 12V
- Wired Cable Length: 2 meters
- Net weight: 501g

TR18



- LED: 418pcs
- Max Power: White LED 50W, Warm LED 50W
- Color Temperature: 3000-6500K
- Inner Diameter: 330mm
- Outer Diameter: 450mm
- Adjust way: Wired Remote Dimming + Remote Control
- Power Supply: Adapter / Charger
- Voltage: 12V
- Wired Cable Length: 2 meters
- Net weight: 767g



TR21

- LED: 560pcs (Cold light: 280pcs, warm light: 280pcs)
- Max Power: 78W
- Color Temperature: 2700K-5600K
- Color Rendering: CRI>90
- Light Angle: >120 degree
- Working Temperature: 0-40°C
- Storage temperature: -10-50°C
- Net weight: 3000g
- Size: 21 inch, 535*640*40mm





Ordinary LED Light



TL40

- Battery: Li-Polymer 3.7V 1000mAh
- Color Rendering: RA>95
- Illumination: 900lux @0.5m, 300lux @1.0m
- Color Temperature: 5500±200K
- Light Angel: 60°
- Waterproof: IP67(10m depth)
- Working time:> 80minutes (100% brightness)
- Fit for: Photographic enthusiast, outdoor sports, Underwater photography, for Gopro and Drone
- Net Weight: 60g
- Size:38*38*36mm



TL80

- Battery: Li-Polymer 3.7V 1000mAh
- Color Rendering: RA>95
- Illumination: 900lux @0.5m, 300lux @1.0m
- Color Temperature: 5500±200K
- Light Angel: 60°
- Waterproof: IP67(10m depth)
- Working time:> 80minutes (100% brightness)
- Fit for: Photographic enthusiast, outdoor sports, Underwater photography, for Gopro and Drone
- Accessories: With 20pcs Color chip filters
- Net Weight: 60g
- Size:38*38*36mm





TL104B

- LED:104pcs
- Color Temperature:3200-6500K
- Illumination angle:60 Degree
- Power: Li-ion Battery , DC
- Power: 3.7V 5000mAh
- Illumination: 850 lux/0.5m
- Net Weight:300g
- Size:129*88*20mm



TL120

- LED: 120pcs
- Battery: Build-in Li-Polymer 3.7V 2700mAh
- Illuminance: 800LM
- Color Temperature: 3200K-5600K(±200K)
- Power: 6.6W (Max)
- Light angle: 120°
- Brightness adjustment: 10-100%
- Charging port: Micro USB
- Net weight: 106g
- Size: 107*65*15mm





TL168

- LED: 168pcs
- Battery: Build-in Li-Polymer 3.7V 2700mAh
- Illuminance: 1100LM
- Color Temperature: 3200K-5600K(±200K)
- Power: 9W (Max)
- Light angle: 120°
- Color Rendering: RA>90
- Brightness adjustment: 10-100%
- Charging port: Micro USB
- Net weight: 130g
- Size: 107*92*15mm



TL288

- LED: 288pcs(warm LED 144 /cold LED 144)
- Input voltage: 7.4-16.8V
- Max Power: 14W
- Illuminance: 1100LUX/1m
- Working temperature: 3200K~5600K (Adjustable)
- Color Rendering: ≥95% (Encoder adjustment)
- Control way: lightness (10-100% adjust Range 1%); color temperature (3200K-5600K, adjust range 100K)
- Working temperature: 0°C~40°C
- DC connector: 15V/3A
- Net weight: approx. 1170g
- Dimension: 376*266*25mm (approx.)






TL416

- LED: 416pcs(warm LED 208 /cold LED 208)
- Power: 32W(Max)
- Brightness: >3600lm
- Brightness Adjustment: 0-100°
- Color temperature: 3200-5600K (±300K)
- Light angle: 120°
- Average life: 50000H
- Power supply: 8.4v (F550, F750, F950)
- Working temperature: -10~40°C
- Color rendering: ≥90
- Net Weight: 192g±10g
- Dimension: 173*92*22mm



TL520

- LED: 520pcs(warm LED 260 /cold LED 260)
- Power: 37W(Max)
- Brightness: >4100lm
- Brightness Adjustment: 0-100°
- Color temperature: 3200-5600K (±300K)
- Light angle: 120°
- Average life: 50000H
- Power supply: 8.4v (F550, F750, F950)
- Working temperature: -10~40°C
- Color rendering: ≥90
- Net Weight: 225g±10g
- Dimension: 173*112*20mm

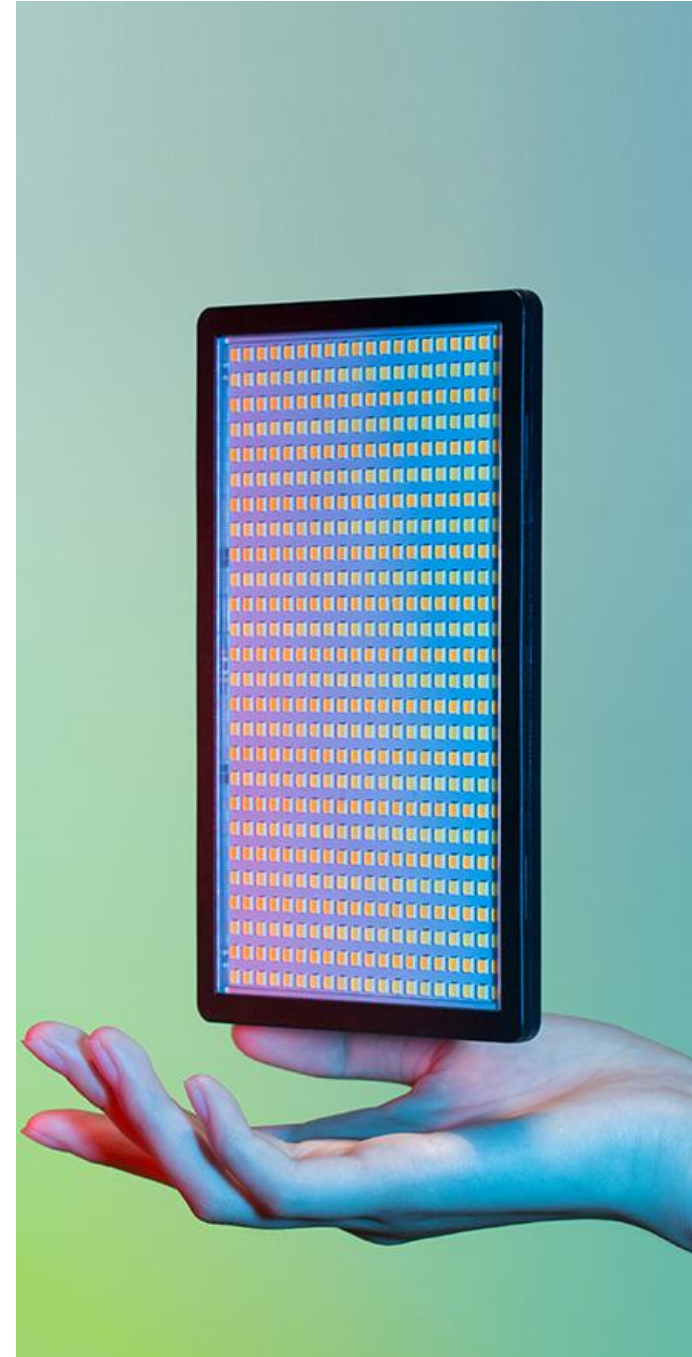



Accessories

TT001



- Material: ABS, PC
- Height: Approx 19cm
- Net Weight: 88g
- Interface: 1/4 Thread Screw

TT002



- Color: Black
- Material: ABS
- Connector: UNC 1/4"
- Load Capacity: 0.5-1kg
- Net Weight: 60g



TT100

- Height: Fold 35cm, Unfold 105cm
- Weight: 350g
- Interface: 1/4 Thread Screw
- Material: Aluminum Alloy





TT50

- Height: Fold 34cm, Unfold 50cm
- Weight: 303g
- Interface: 1/4 Thread Screw
- Material: Metal

TT200

- Height: Fold 70cm, Unfold 210cm
- Weight: 703g
- Interface: 1/4 Thread Screw
- Material: Metal

TT150

- Height: Fold 56cm, Unfold 160cm
- Weight: 538g
- Interface: 1/4 Thread Screw
- Material: Metal

